

# Calibration Gas Disposable Aluminum Cylinder Valve

## VCV-16 Series

### Product Features

- Disposable Calibration Gas Cylinder Valve
- Brass chrome plated body or stainless steel body

### Typical Applications




- Designed for calibration applications.

### Technical Data

Inlet pressure:	max. 200 bar
Body material:	see ordering info
Inlet connection:	1"-14UNF/3/4"-16UNF
Outlet connection:	5/8"-18UNF
Leak rate:	Bubble-tight
Temperature range:	-20°C to +70°C
Weight:	0.10kg



### Dimensions (mm)

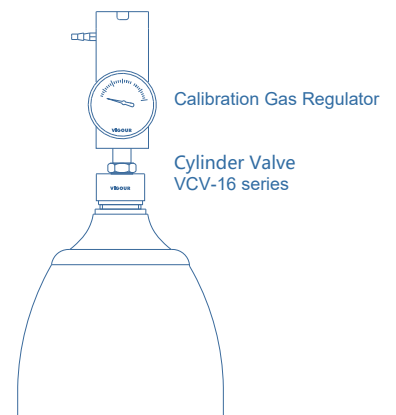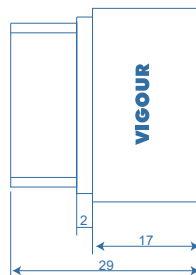

### Ordering Information

**VCV - 16 S - 40 - A**

<b>Body Material</b> S: 316L C: Chrome Plated Brass	<b>Inlet connection</b> None: 1"-14UNF A: 3/4"-16UNF
<b>Inlet pressure</b> 40: 40 bar 200: 200 bar	

