

Product Features

- Pressure control panel
- VSR-1E / VSR-6E Series single-stage regulator
- Brass chrome plated body for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- Stainless steel 316L body for corrosive gases
- Modular design
- Diaphragm type shut-off valves
- Suitable for inlet pressure up to 300 bar
- Easy installation into safety cabinet for gas cylinders
- Tested for use with oxygen

Typical Applications


- Component Testing
- Calibration Systems
- Laboratory Pressure Control
- High Pressure Sampling Systems
- Service & Test Equipment





Technical Data

Type:	Double stage
Inlet pressure P1:	max. 300 bar
Outlet pressure P2:	2/4/10/20/50/100/200 bar
Materials	
Body regulator:	see ordering info
Valve seat (regulator):	PCTFE
(shut-off valve):	PCTFE
Diaphragm (regulator):	Hastelloy®C276
(valve):	Elgiloy®
O-ring:	Viton® (FKM)
(option)	Kalrez® (FFKM)
Filter:	SS 316L
Inlet connection:	1/4"NPT(F)
Outlet connection:	1/4"NPT(F)
Temperature range:	-30°C to +74°C
Leak rate (to atmosphere):	1x10 ⁻⁸ mbar l/s He
(via seat):	1x10 ⁻⁶ mbar l/s He
Weight:	3.5kg


Schematic Drawing

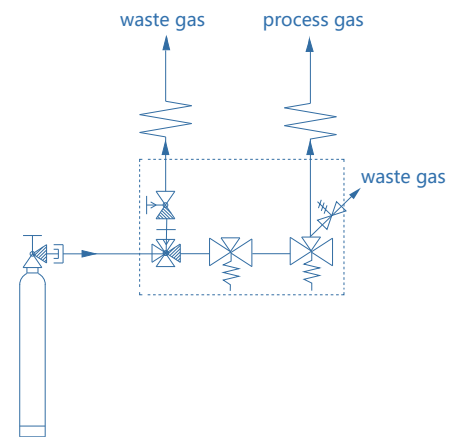

Flow Chart

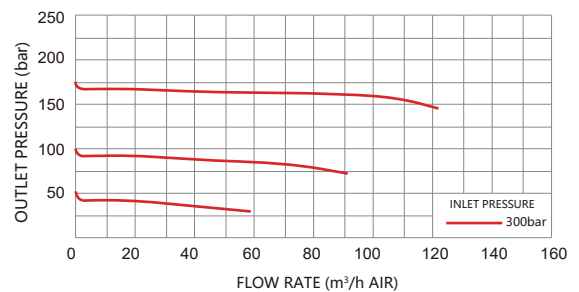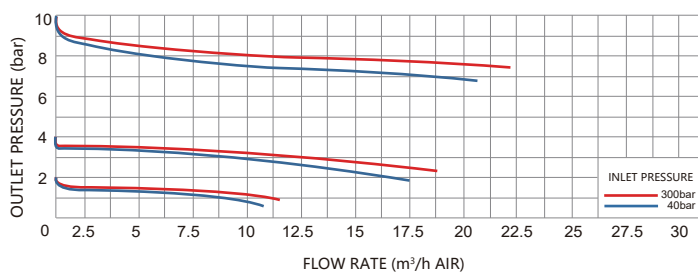

Dimensions (mm)

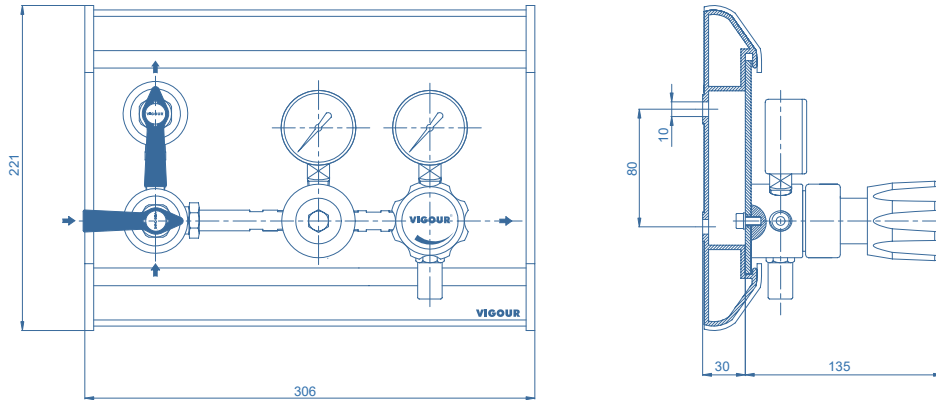

Ordering Information

VSP - 1DES - 300 - 10 - P - P - V - N₂

Body Material
S: 316L
C: Chrome Plated Brass

Inlet Pressure P₁
40: 40 bar
100: 100 bar
200: 200 bar
300: 300 bar

Outlet Pressure P₂
2: to 2 bar
4: to 4 bar
10: to 10 bar
20: to 20 bar
50: to 50 bar (Non Relief valve)
100: to 100 bar (Non Relief valve)
200: to 200 bar (Non Relief valve)

Type Of Gas
Please specify type of gas

Option
Blank: Includes inlet valve and purge valve
V: Including inlet valve, not including purge valve

Outlet Pressure Indication
P: Pressure gauge
K: Contact gauge

Inlet Pressure Indication
P: Pressure gauge
K: Contact gauge

