

Calibration Gas Regulators / Regler fuer Kalibriergase

VSR-15 Series

Product Features


- Cylinder pressure regulator
- Brass chrome plated body or stainless steel body
- Piston type

Typical Applications


- Calibration system

Technical Data


Type:	single-stage
Inlet pressure:	max. 200 bar
Outlet pressure:	4 bar(standard) 2 bar(option)
Outlet flow settings:	see ordering info
Materials	
Body regulator:	see ordering info
Temperature range:	-20°C to +50°C
Leak rate:	Bubble-tight
Weight:	0.35 kg

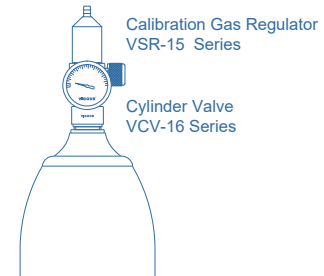

Dimensions (mm)

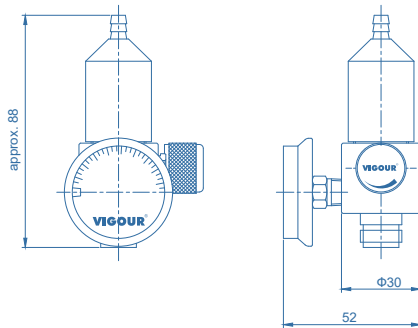

Flow Chart

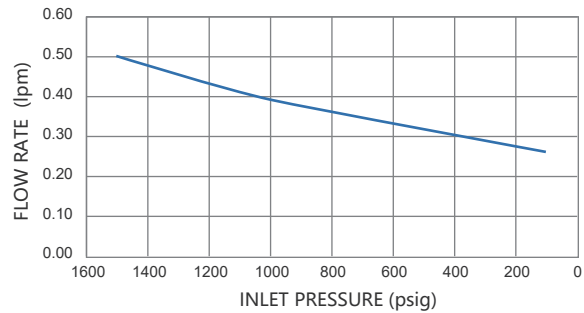

Ordering Information

VSR - 15C - 200 - 4 - 0.2 - C10 - 3/16 - W — Flow Setting Type

Body Material	S: 316L C: Chrome Plated Brass	Outlet connection	3/16: 3/16" Hose barb
Inlet Pressure P₁	20: 20 bar 200: 200 bar	Inlet connection	C10: 5/8-18 UNF (C-10) CGA600: CGA600
Outlet Pressure P₂	2: 2 bar (standard) 4: 4 bar (option)	Normal Flow	0.2: 0.2 LPM 1.5: 1.5 LPM 0.3: 0.3 LPM 2.5: 2.5 LPM 0.5: 0.5 LPM 5: 5 LPM 1: 1 LPM 6: 6 LPM
		Flow Setting Type	W: Hand wheel

